



## Free-Standing Combi - Freezer Bottom

KNM4760XN



### FEATURES

- Metal håndtag
- Stor Kapacitet
- 38 dBA

#### Skuffe til kød og mejeriprodukter

Ved at holde temperaturen lige over frysepunktet bevares en optimal luftfugtighed. Kød, fisk og mælkeprodukter bevarer al deres smag, friske udseende og næringsindhold i længere tid.

#### NoFrost / Ventilert køling

Med denne teknologi opbygges der ingen rim i fryseren, så du behøver aldrig at afrime fryseren igen. Samt et lavt strømforbrug.

#### Freezer Defense

Blomberg kombiskabe har en unik funktion der hedder Freezer defense. Den tillader, at fryseskabet fortsætter med at fungere 100% selv ved temperaturer helt ned til minus 15 grader i tørre lokaler.

#### Kitchen fit 90° åbning


Kitchen fit døre åbner om sin egen akse og stikker derfor ikke udover skabets korpus. Dette giver flere placeringssmuligheder og sikrer at dørene ikke støder på de øvrige køkkenelementer.

### GENERAL

Type	Free-Standing
Total Volum	362 liters
Capacity Fridge	253 liters
Capacity Freezer	109 liters
Color	Inox
Freezer Position	Freezer Bottom
Cooling System Type	No Frost
Control	Rotational Controller on Ceiling
Control System	Mechanic with Sensor
Display	No
Display Type	No Display
Light	LED
Door Opening Direction	Right
Reversible Door	Yes
Open Door Alarm	Yes
Quick Cool	No
Quick Freeze	Yes
Eco Mode	No
Holiday Mode	No
VitaminZone	No
Dairy Compartment	Yes
Freezer Defense	Yes
Ice Maker Type	Icebox
Glas Shelves	Glass-All standard
Wine Rack Type	Plastic

### PERFORMANCE AND TECHNICAL INFORMATION

Energy Efficiency Class	E
Noiselevel	38 dBA
Noiselevel Class	C
Climat Class	SN-T
Dimensions (HxWxD)	202.5 x 59.5 x 67 cm
Plug Type	European
Cable Lenght	2.20 m
Daily Freezing Capacity	5.0 kilograms
Energy Consumption (kWh/annum)	258 kWh/annum
Refrigerant	R600a
Refrigerant Charge (kg)	0.062

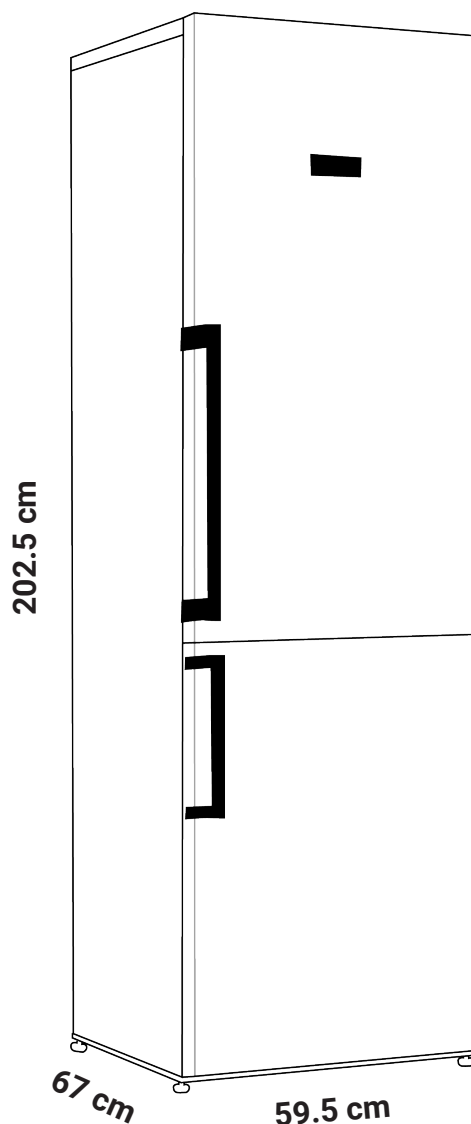

- Place the product on an even floor surface to prevent jolts.
- Install the product at least 30 cm away from heat sources such as hobs, heater cores and stoves and at least 5 cm away from electrical ovens.
- Product must not be subjected to direct sun light and kept in humid places.
- Appropriate air ventilation must be provided around your product in order to achieve an efficient operation. If the product is to be placed in a recess in the wall, pay attention to leave at least 5 cm distance with the ceiling and side walls.
- Your product requires adequate air circulation to function efficiently. If the product will be placed in an alcove, remember to leave at least 5 cm clearance between the product and the ceiling, rear wall and the side walls.  
If the product will be placed in an alcove, remember to leave at least 5 cm clearance between the product and the ceiling, rear wall and the side walls. Check if the rear wall clearance protection component is present at its location (if provided with the product). If the component is not available, or if it is lost or fallen, position the product so that at least 5 cm clearance shall be left between the rear surface of the product and the wall of the room. The clearance at the rear is important for efficient operation of the product.
- If two refrigerators are to be installed side by side, there should be at least 2 cm distance between them.
- The ambient temperature of the room where you install your refrigerator should at least be 10°C. Operating your refrigerator under cooler conditions is not recommended with regard to its efficiency.